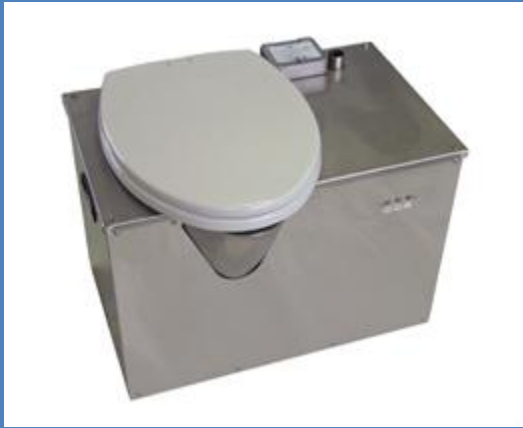



# Bio-toilet for general use

<http://www.stareng.co.jp/baio/index.html>

appearance		
	specification	
Type	BT-S	BT-L
Disposable capacity	Max. 5L/day <sup>*1</sup>	Max. 10L/day <sup>*1</sup>
Power source	AC100V (50/60Hz)	AC100V (50/60Hz)
Power consumption	Max. 380W	Max. 720W
Weight	48kg	85kg
Size	640*485*515 mm	670*800*755 mm
Process type	Acidulo <sup>TM</sup> compost decomposition process	

\*1 5L/day corresponds to 20 times/day in Japanese style usage .

# Bio-toilet for railway use



## Specification

Type	BT-50
Disposable capacity	Max. 50L/day <sup>*1</sup> <sup>*2</sup>
Process type	Acidulo™ compost decomposition process

- Installed under the vehicle
- Original deodorizer is attached
- Heater temperature, a blower and an agitator are controlled

\*2 Size and capacity can be designed according to the requirement of the customer.

## Test condition

Period : total 241 days

Disposed amount : total 5,135 L